



## 19. REMOVAL OF TEMPORARY STAIRWELL INFILLS

There are 5 configurations of temporary stairwell infill panels supplied by Donaldson Timber Systems these are shown on the pages following the pictorial removal information


Removal of the panels is the same system for all types




- Accessing the level above from the scaffold via the access/egress panel
- Cut back the flooring ready to accept the nosing of the staircase
- Unscrew the ledger locks fixing the temporary stairwell infill panels in place




- From above and before you remove any temporary stairwell infill panels fit a temporary handrail around the stairwell
- Exit the upper floor via the access / egress panel




- From below set up adequate podium steps or 600mm x 600mm professional hop ups
- Lift and slid panel #1 onto the f/f level, 2 man lift
- Cut the exposed ledgers to allow the stairs to be fitted
- Handrail image has been removed for illustration only



- Prep the stairs
- Lift the stair into position and screw fix the underside of the stringer to the wall, minimum 2 man lift
- Fit a temporary handrail to the staircase




- From the stairs 2 men can slide panels forward and lift onto the f/f
- Panels can also be taken to ground floor slab from above if the weight allows
- From there two men can carry the panels down the stairs and out to the designated area



- Remove all ledgers and check all walls line through
- Continue with any stair finishing's within your package


OHS/DTS/29 Rev No: 1 Date: February 23 Page - 57 - of 71



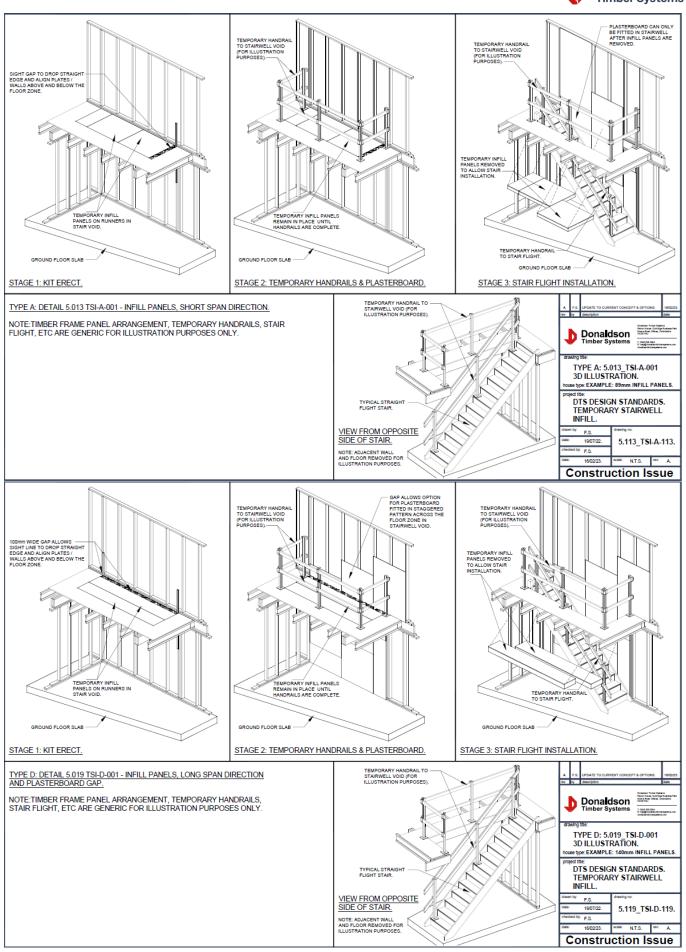


OHS/DTS/29 Rev No: 1 Date: February 23 Page - 58 - of 71



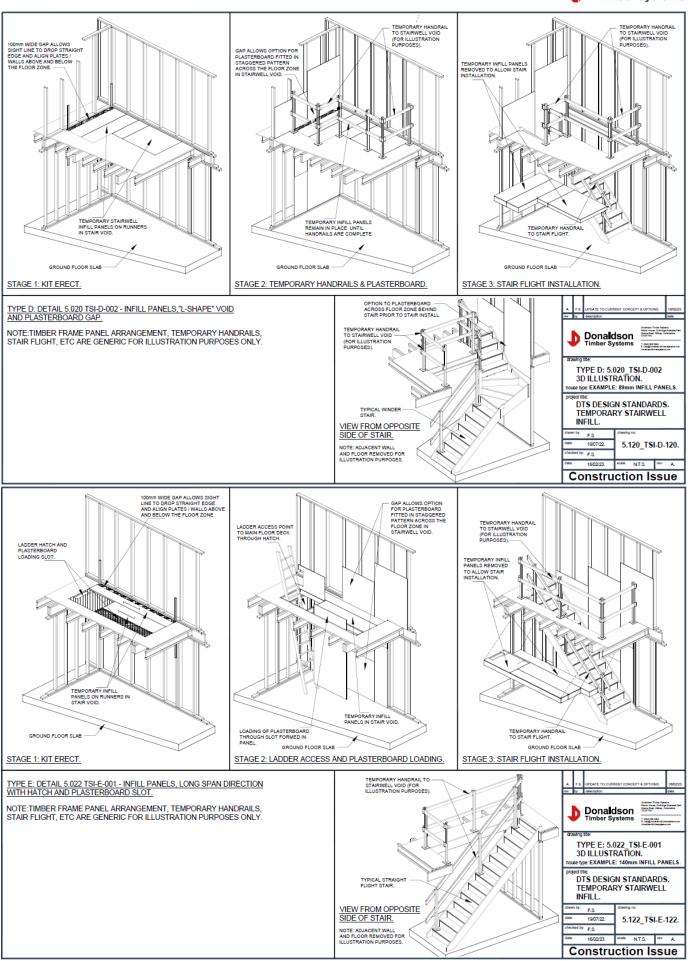

OHS/DTS/29 Rev No: 1 Date: February 23 Page - 59 - of 71



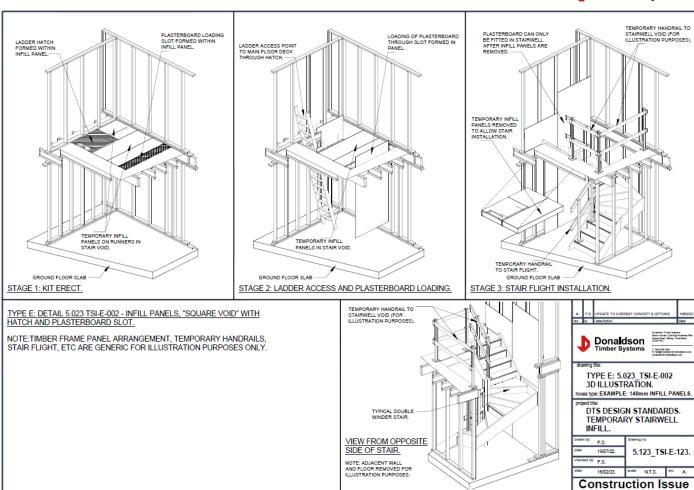

OHS/DTS/29 Rev No: 1 Date: February 23 Page - 60 - of 71